



METHODOLOGY FOR BATH ROOM

A) Waterproofing treatment with Star Proof MB 602 (Rubberized Synthetic Coating)

1. SURFACE PREPARATION

The surface to be coated must be sound and clean, free of all traces of paints, coatings, efflorescence, loose particles, grease, oil, de-molding agents, dust, gypsum plaster, etc. Chisel all the unwanted / dead concrete and clean the entire surface by using wire brush.

2. CRACK FILLING

Filling Junctions with Polymer Modified Mortar using STARBOND SBR SUPER

3. PRIME COAT

Apply Primer Coat of Starcrete ACR 30 with cement ratio of 1:1. Allow to dry for 4-6 hrs.

4. COATING

After complete drying of the primer and bonded areas, Apply 2 coats of **STARPROOF WF MB 602** with brush, roller or spray gun. A brush with horse hair bristles will provide almost texture-free, smooth surfaces. Dilution up to 20% for 1st coat and 10% for 2nd coat is allowable. Each coat shall have an interval time of 6-8 hrs for curing. Coverage 16-20 sq. ft in Two Coats. Second coat of WF MB 602 and broadcasting of sand in wet condition.

Finally apply screed plaster → Brick Bat Coba → Indian patent Stone

B) Waterproofing treatment with Starcem 2 K (Cementitious Coating)

SURFACE PREPARATION

The surface to be coated must be sound and clean, free of all traces of paints, coatings, efflorescence, loose particles, grease, oil, de-molding agents, dust, gypsum plaster, etc. Chisel all the unwanted / dead concrete and clean the entire surface by using wire brush.

CRACK FILLING

Filling Junctions with Polymer Modified Mortar using STARBOND SBR SUPER

COATING

After complete process of surface preparation, Apply 2 coats of **STARCEM 2 K** with brush,. First pre wet the surface then apply 1st coat of Starcem 2K followed by 2nd coat in the interval of 6-8 hours after first coat @ 1.5-1.75 kg per sqm mtrs DFT 1mm. A brush with horse hair bristles will provide almost texture-free, smooth surfaces. Coating has to done up to 2-3 feet from the floor height on all walls.

INDIA

Tel. +91 9712925770
Email: - info@sspchem.com
www.star-uae.com

KSA

Tel. +996 12 677 7073
Email: - ksa@star-uae.com
www.star-uae.com

UAE

Tel. +971 6 5611411
Email: - uae@star-uae.com
www.star-uae.com




STAR SPECIALTIES POLYMERS PVT. LTD.

Survey No 52/3 & 54/6-D, Daman Industrial Estate, Village - Kadaiya, Nani Daman, Daman – 396210

Ph: 91-9712925770, <http://www.ssplchem.com>, Mail: -info@ssplchem.com



Finally apply screed plaster → Brick Bat Coba → Indian patent Stone

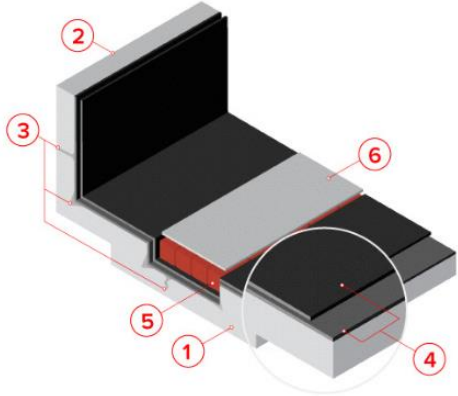

INDIA

Tel. +91 9712925770
Email: - info@ssplchem.com
www.star-uae.com

KSA

Tel. +996 12 677 7073
Email: - ksa@star-uae.com
www.star-uae.com

UAE

Tel. +971 6 5611411
Email: - uae@star-uae.com
www.star-uae.com